




DETAIL A

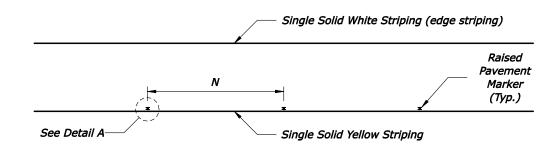

SINGLE SOLID YELLOW STRIPING WITH RAISED PAVEMENT MARKERS

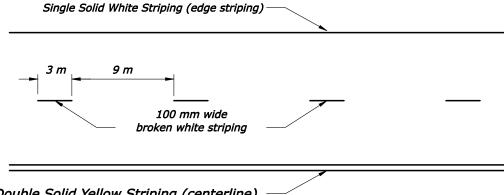


Double Solid Yellow Striping (centerline)

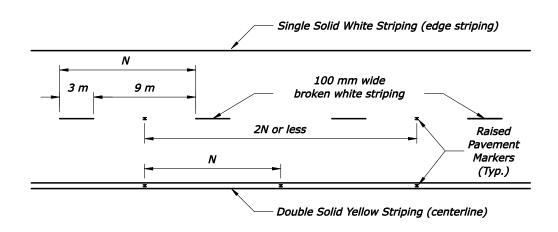


BROKEN SINGLE WHITE AND DOUBLE SOLID YELLOW STRIPING WITH RAISED PAVEMENT MARKERS

BROKEN SINGLE WHITE AND DOUBLE SOLID YELLOW STRIPING

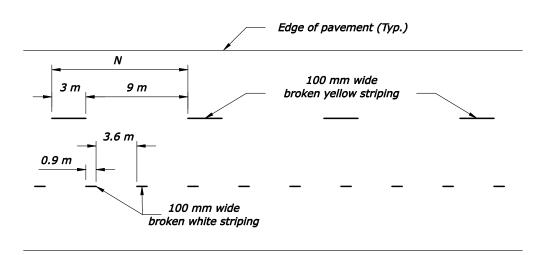

BROKEN SINGLE YELLOW AND DOTTED WHITE STRIPING

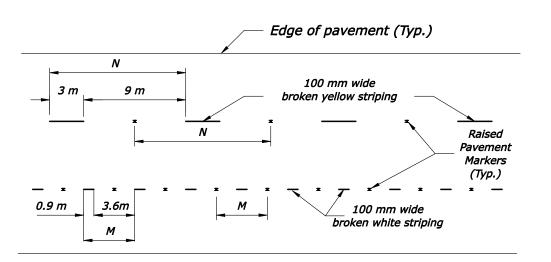

BROKEN SINGLE YELLOW AND DOTTED WHITE STRIPING WITH RAISED PAVEMENT MARKERS U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION

METRIC DETAIL

PAVEMENT MARKINGS WITH AND WITHOUT **RAISED PAVEMENT MARKERS**

DETAIL APPROVED FOR USE REVISED: 9/95 07/98 03/2007

REG

SE

edition.

NOTES:

STATE

LA

are in millimeters.

1. Unless otherwise shown, dimensions

2. All striping shall be in accordance with the Manual on Uniform Traffic Control Devices (MUTCD) latest

3. Space and install Raised Pavement Markers in accordance with the MUTCD and as shown in this detail

or as directed by the CO.

PROJECT

RRP-LOP 10(2)

SHEET NO.

DETAIL EM634-03

NO SCALE